

durability
dependability

At **RDA Solutions, LLC**, we value our customers feedback. We are consistently working with engineers to develop a line of Omni Antennas that are specifically designed to withstand the many rigors of the oil and gas industry.

We pride ourselves in service before, during and after the sale.

Introducing the

RDA Dual Band Omni Antenna

- 2.4-2.5 GHz / 4.94-5.925 GHz
- 5 dBi / 7 dBi
- Includes NFemale Barrel Connector



Electrical Specs:


Frequency Range	2.4-2.5 / 4.9-5.9 Ghz
Impedance	50Ohm
VSWR	less than 2.0:1
Gain	5/7 dBi
Polarization	Vertical
Radiation	Omni
Average Power	25 W
Horizontal Beam Width	360°
Vertical Beam Width	25° / 15°

Mechanical Specs:

Height	Ø1.25×260mm (10.2")
Wind Rating	125 mph
Termination	N Male (N Female barrel connector included)
Radome Material	Fiberglass
Mounting bracket	Sold Separately



N Female barrel connector included

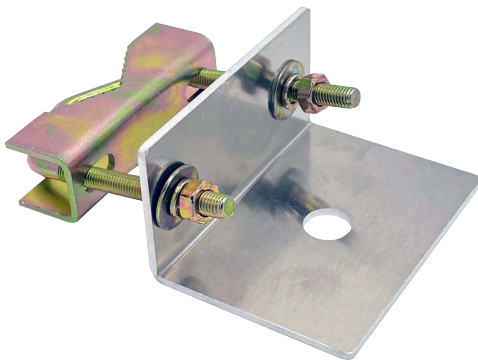

2" Pole Mount Bracket (AB-02) Sold Separately

